


## BELTEX C35/16 TRANSMISSION BELT

Code 7303

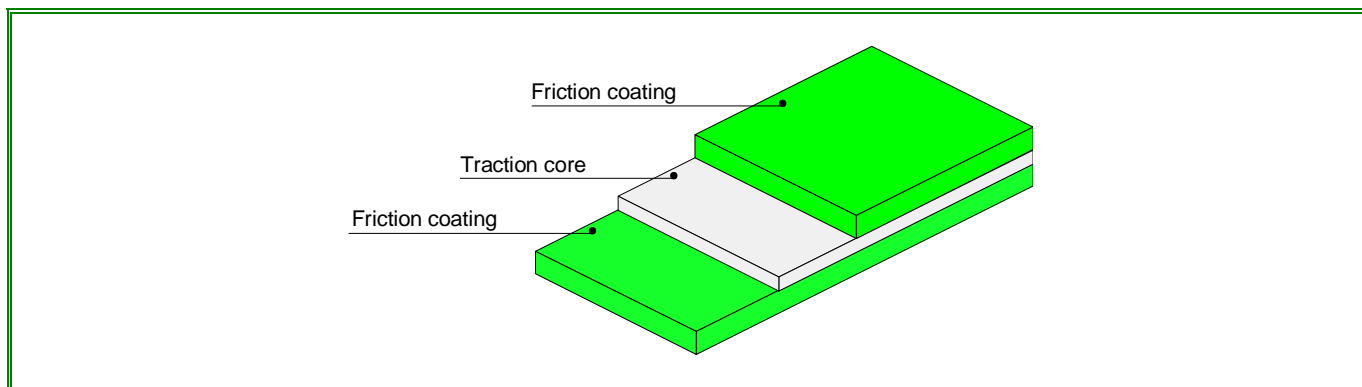

### Most popular applications:

Paper industry, graphic arts. Rewinder machines, folder-glueers, tube winders etc.

### BELT STRUCTURE

Description	Protection cover	Traction core	Friction coating
Material	Elastomer NBR	PA sheet	Elastomer NBR
Finishing	Fine fabric	---	Fine fabric
Colour	Green	Transparent	Green
Friction coefficient on iron	0,7	---	0,7

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	3,5	Breaking load [N/mm]	140	Working Temperature [°C]	0 ÷ 100
Thickness [mm]	1,6	Production width [mm]	500	Diameter [mm]	30
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	1,7	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of skiving	A	Skiving length [mm]	25 ÷ 30	Press temperature [°C]	90	Pressing time [min]	15
-----------------	---	---------------------	---------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.