


## BELTEX C50/32 TRANSMISSION BELT

Code 7400

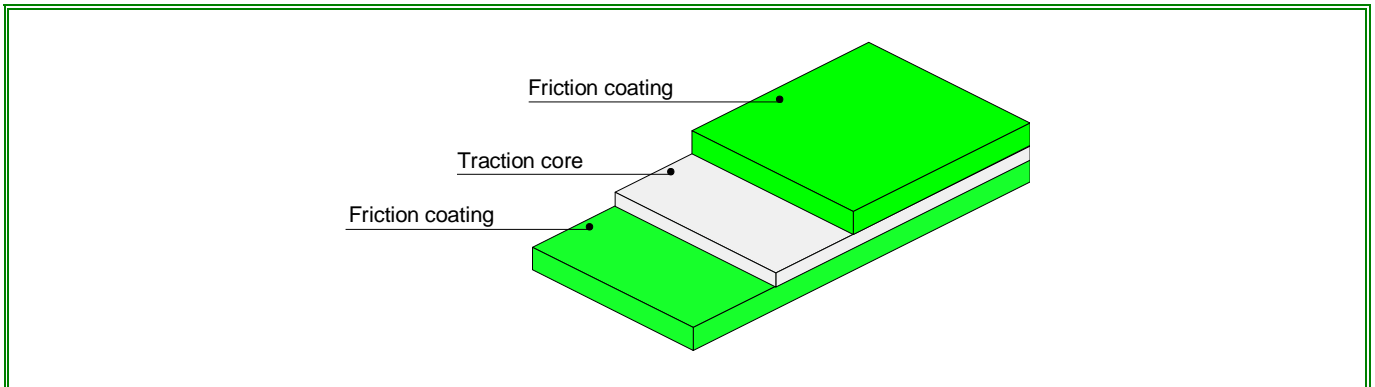

### Most popular applications:

Paper industry, graphic arts. Rewinding machines, folder-glueers, tube winders etc.

### BELT STRUCTURE

Description	Protection cover	Traction core	Friction coating
Material	Elastomer NBR	PA sheet	Elastomer NBR
Finishing	Fine fabric	---	Fine fabric
Colour	Green	Transparent	Green
Friction coefficient on iron	0,7	---	0,7

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	5,0	Breaking load [N/mm]	200	Working Temperature [°C]	0 ÷ 100
Thickness [mm]	3,2	Production width [mm]	500	Diameter [mm]	30
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	3,4	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of skiving	C	Skiving length [mm]	65 ÷ 70	Press temperature [°C]	90	Pressing time [min]	30
-----------------	---	---------------------	---------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.