


## BELTEX F100/34 TRANSMISSION BELT

Code 7210

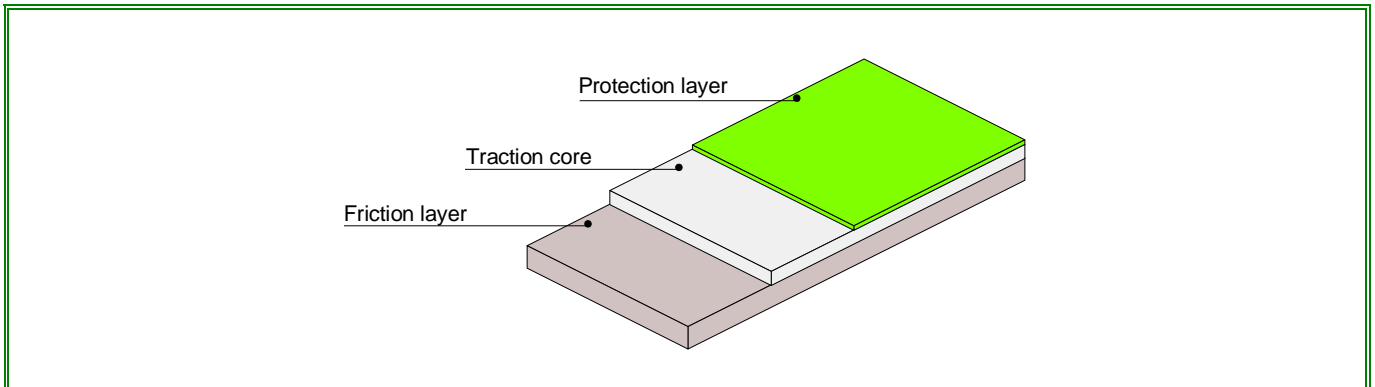

### Most popular applications:

Power transmission belts for flour mills, paper mills, textile industry, mechanical industry.

### BELT STRUCTURE

Description	Protection cover	Traction core	Friction coating
Material	PA Fabric	PA sheet	Leather
Finishing	Skimming	---	Buffed
Colour	Green	Transparent	Gray
Friction coefficient on iron	0,25	---	0,4

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	10,0	Breaking load [N/mm]	395	Working Temperature [°C]	-30 ÷ 80
Thickness [mm]	3,4	Production width [mm]	500	Min. diameter [mm]	100
Antistaticity	No	Mass [kg/m <sup>2</sup> ]	3,3	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of kiving	B	Skiving length [mm]	70 ÷ 75	Press temperature [°C]	90	Pressing time [min]	30
----------------	---	---------------------	---------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.