


BELTEX F150/39 TRANSMISSION BELT

Code 7116

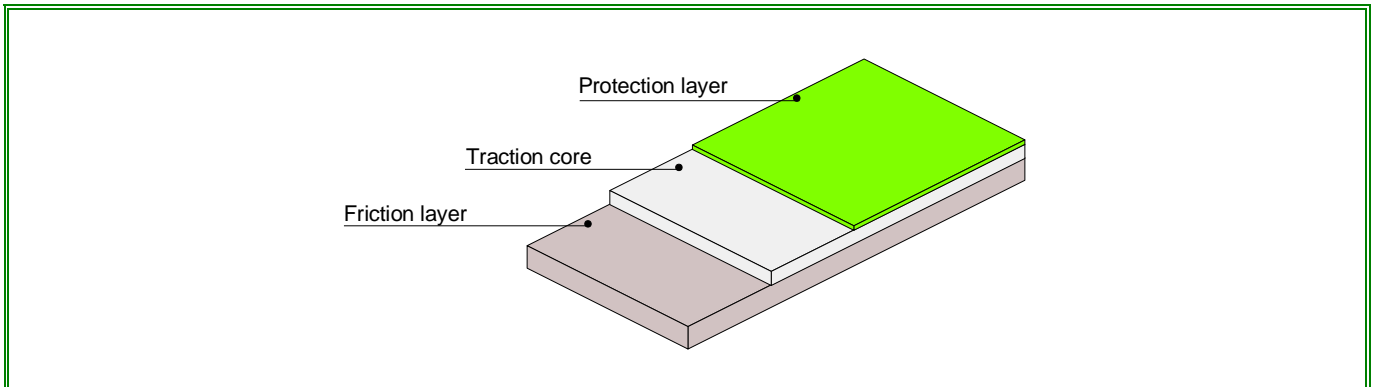

Most popular application:

Power transmission belts for flour mills, paper mills, textile industry, mechanical industry.

BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	PA Fabrik	PA Sheet	Leather
Finishing	Skimming	---	Buffed
Colour	Green	Transparent	Gray
Friction coefficient on iron	0,25	---	0,4

TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	15,0	Breaking load [N/mm]	600	Working Temperature [°C]	-30 ÷ 80
Thickness[mm]	3,9	Production width [mm]	500	Diameter [mm]	150
Antistaticity	No	Mass [kg/m ²]	3,9	Splicing method	Skiving

SPLICING PARAMETERS

Kind of skiving	B	Dimensions [mm]	80 ÷ 85	Press temperature [°C]	90	Pressing time. [min]	35
-----------------	---	-----------------	---------	------------------------	----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.