


BELTEX F75/32 TRANSMISSION BELT

Code 7905

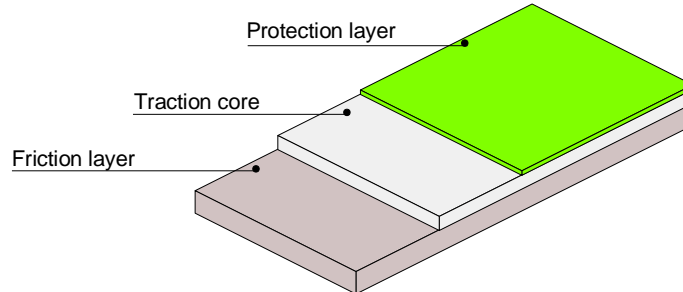

Most popular application:

Power transmission belts for flour mills, paper mills, textile industry, mechanical industry.

BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	PA Fabric	PA sheet	Leather
Finishing	Skimming	---	Buffed
Colour	Green	Transparent	Gray
Friction coefficient on iron	0,25	---	0,4

TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	7,5	Breaking load [N/mm]	295	Working Temperature [°C]	-30 ÷ 80
Thickness[mm]	3,2	Production width [mm]	500	Diameter [mm]	75
Antistaticity	no	Ma]	3,2	Splicing method	Skiving

SPLICING PARAMETERS

Kind of skiving	B	Dimensions [mm]	50 ÷ 60	Press temperature [°C]	90	Pressing time. [min]	20
-----------------	---	-----------------	---------	------------------------	----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.