


BELTEX L100/48 TRANSMISSION BELT

Code 7109

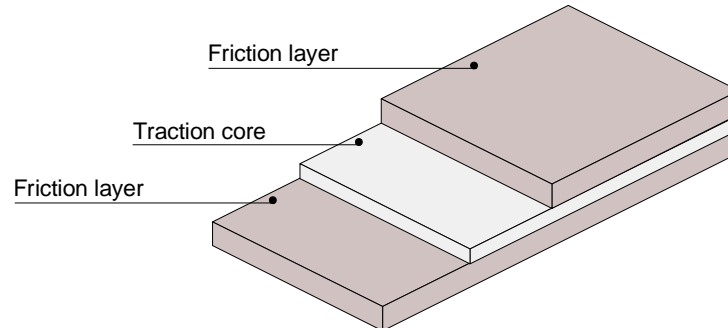

Most popular applications:

Power transmission belts for flour mills, paper mills, textile industry, mechanical industry. Suitable for power transmission on both faces.

BELT STRUCTURE

Description	Protection cover	Traction core	Friction coating
Material	Leather	PA sheet	Leather
Finishing	Buffed	---	Buffed
Colour	Gray	Transparent	Gray
Friction coefficient on iron	0,4	---	0,4

TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	10,0	Breaking load [N/mm]	395	Working Temperature [°C]	-30 ÷ 80
Thickness [mm]	4.8	Production width [mm]	500	Min. diameter [mm]	100
Antistaticity	No	Mass [kg/m ²]	4,6	Splicing method	Skiving

SPLICING PARAMETERS

Kind of kiving	C	Skiving length [mm]	90 ÷ 95	Press temperature [°C]	90	Pressing time [min]	40
----------------	---	---------------------	---------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.