


BELTEX L75/48 TRANSMISSION BELT

Code 7906

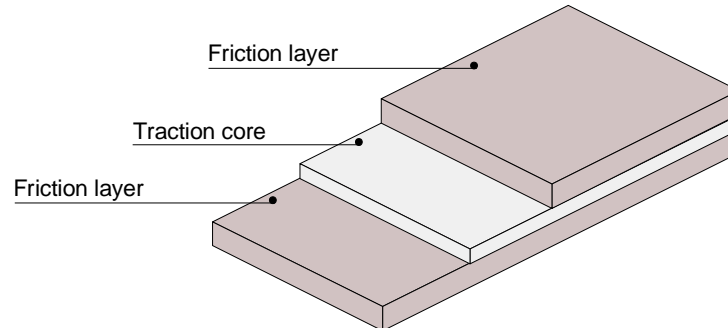

Most popular application:

Power transmission belts for flour mills, paper mills, textile industry, mechanical industry. Suitable for power transmission on both faces.

BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	Leather	PA Sheet	Leather
Finishing	Buffed	---	Buffed
Colour	Grey	Transparent	Grey
Friction coefficient on iron	0,4	---	0,4

TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	7,5	Breaking load [N/mm]	295	Working Temperature [°C]	-30÷80
Thickness[mm]	4,8	Production width [mm]	500	Diameter [mm]	75
Antistaticity	No	Mass [kg/m ²]	4,8	Splicing method	Skiving

SPLICING PARAMETERS

Kind of skiving	C	Dimensions [mm]	85 ÷ 90	Press temperature [°C]	90	Pressing time. [min]	40
-----------------	---	-----------------	---------	------------------------	----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.