


BELTEX M120/30 TF CONVEYOR BELT

Code 7760

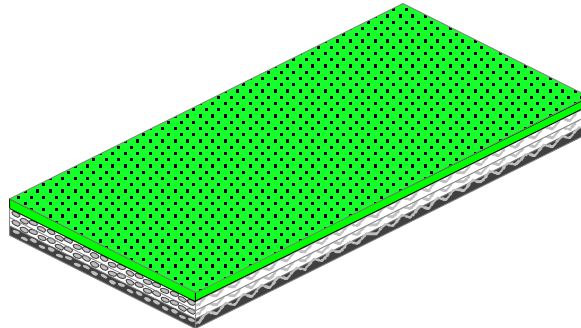

Most popular application:

Belts for conveyors both horizontal and inclined. Paper converting, graphic arts, bindery, Packaging.

BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	NBR Elastomer	3 ply PA	Fabric
Finishing	Fabric	---	Impregnation
Colour	Green	---	Black
Friction coefficient on iron	0,7	---	0,25

TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	12	Breaking load [N/mm]	165	Working Temperature [°C]	-20 ÷ 100
Thickness[mm]	3,0	Production width [mm]	1500	Diameter [mm]	50
Antistaticity	Yes	Mass [kg/m ²]	3,3	Splicing method	Skiving

SPLICING PARAMETERS

Kind of skiving	A	Dimensions [mm]	45 ÷ 50	Press temperature [°C]	90	Pressing time. [min]	25
-----------------	---	-----------------	---------	------------------------	----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.