


BELTEX ME120/23 TG CONVEYOR BELT

Code 7765

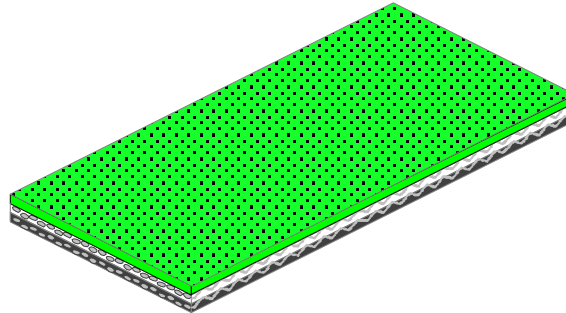

Most popular application:

Belts for conveyors both horizontal and inclined. Paper converting, graphic arts, bindery, Packaging.

BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	NBR Elastomer	2 ply E	E Fabric
Finishing	Heavy fabric	---	Impregnation
Colour	Green	---	Black
Friction coefficient on iron	0,7	---	0,25

TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	12	Breaking load [N/mm]	220	Working Temperature [°C]	-20 ÷ 100
Thickness[mm]	2,3	Production width [mm]	1500	Diameter [mm]	50
Antistaticity	Yes	Mass [kg/m ²]	2,3	Splicing method	F.o.F

SPLICING PARAMETERS

Kind of skiving	F.o.F.	Dimensions [mm]	80X13	Press temperature [°C]	170	Pressing time. [min]	15
-----------------	--------	-----------------	-------	------------------------	-----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.