


## BELTEX ME120/55 SG CONVEYOR BELT

Code 7825

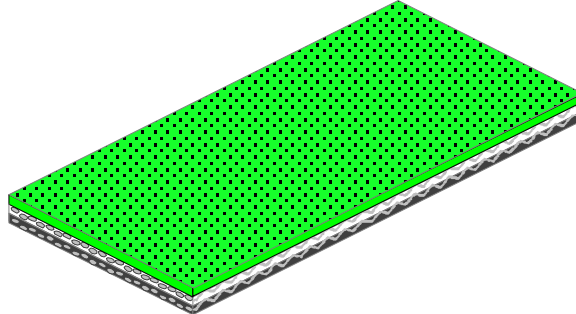

### Most popular application:

Belts for conveyors both horizontal and inclined. Paper converting, graphic arts, bindery, Packaging.

### BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	NR Elastomer	2 ply E	E Fabric
Finishing	Supergrip	---	Impregnation
Colour	Green	---	Black
Friction coefficient on iron	0,7	---	0,20

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	12	Breaking load [N/mm]	220	Working Temperature [°C]	-20 ÷ 100
Thickness[mm]	5,5	Production width [mm]	1500	Diameter [mm]	100
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	5,5	Splicing method	Step

### SPLICING PARAMETERS

Kind of joint	Step.	Dimensions [mm]	Press temperature [°C]	175	Pressing time. [min]	15
---------------	-------	-----------------	------------------------	-----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.