


## BELTEX MX30/11 CONVEYOR BELT

Code 7803

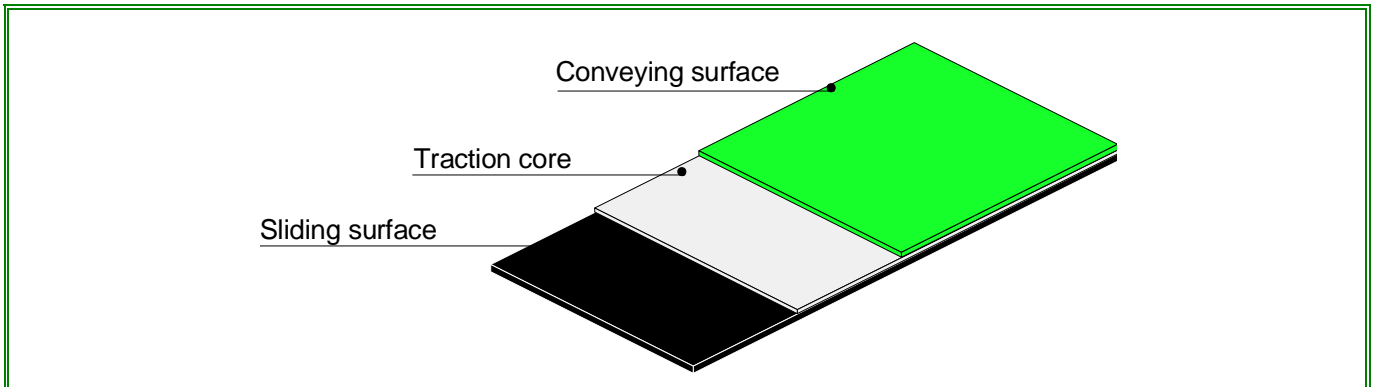

### Most popular application:

Flat conveying belt. Paper converting, graphic arts, binderies, magnetic conveyors, packaging.

### BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	PA fabric	PA sheet	PA fabric
Finishing	Smooth	---	Impregnation
Colour	Green	Transparent	Black
Friction coefficient on iron	0,25	---	0,25

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	3,0	Breaking load [N/mm]	130	Working Temperature [°C]	-20 ÷ 100
Thickness[mm]	1,1	Production width [mm]	500	Diameter [mm]	30
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	1,0	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of kiving	A	Skiving length [mm]	25÷30	Press temperature [°C]	90	Pressing time [min]	15
----------------	---	---------------------	-------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.