


## BELTEX MX30/13 CONVEYOR BELT

Code 7603

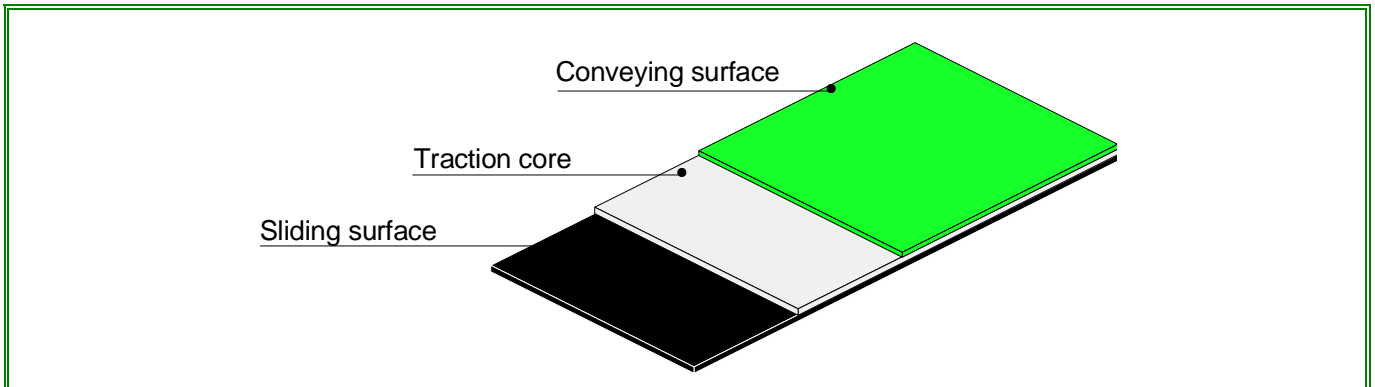

### Most popular application:

Flat conveying belt. Paper converting, graphic arts, binderies, magnetic conveyors, packaging.

### BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	PA sheet	PA sheet 0.35 mm	PA fabric
Finishing	Smooth	Smooth	Impregnation
Colour	Green	Transparent	Black
Friction coefficient on iron	0,7	---	0,25

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	3,0	Breaking load [N/mm]	130	Working Temperature [°C]	-20 ÷ 100
Thickness[mm]	1,3	Production width [mm]	500	Diameter [mm]	30
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	1,4	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of kiving	A	Skiving length [mm]	25÷30	Press temperature [°C]	90	Pressing time [min]	15
----------------	---	---------------------	-------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.