


## BELTEX M50/20 TF CONVEYOR BELT

Code 7755

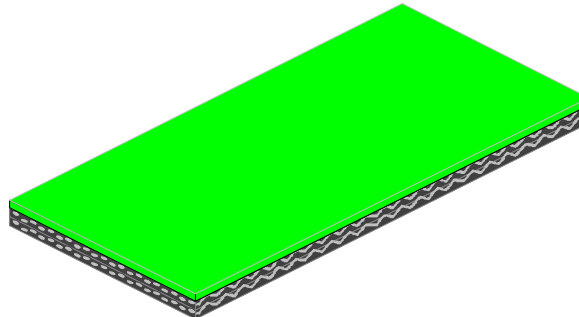

### Most popular application:

Belts for conveyors both horizontal and inclined. Paper converting, graphic arts, bindery, Packaging.

### BELT STRUCTURE

Description	Conveying surface	Traction core	Friction coating
Material	NBR Elastomer	2 ply PA	Fabric
Finishing	Fabric	---	Impregnation
Colour	Green	---	Black
Friction coefficient on iron	0,7	---	0,25

### TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	5,0	Breaking load [N/mm]	110	Working Temperature [°C]	0 ÷ 100
Thickness[mm]	2,0	Production width [mm]	1500	Diameter [mm]	40
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	2,1	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of skiving	A	Dimensions [mm]	30 ÷ 35	Press temperature [°C]	90	Pressing time. [min]	20
-----------------	---	-----------------	---------	------------------------	----	----------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.