


## BELTEX P150/26 TRANSMISSION BELT

Code 7615

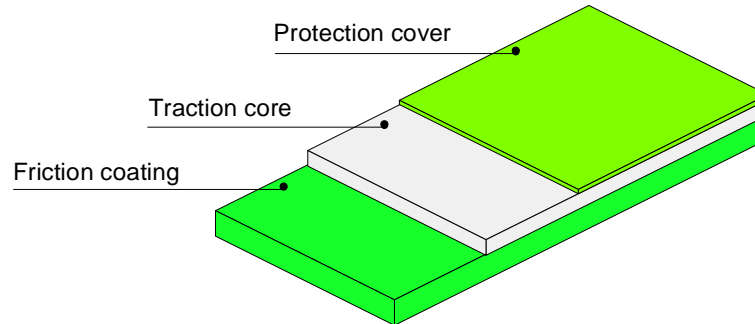

### Most popular applications:

Transmission of small and mean horsepower. Paper industry, graphic arts. chemical, textile mechanical industries, wood processing.

### BELT STRUCTURE

Description	Protection cover	Traction core	Friction coating
Material	PA Fabric	PA sheet	XNBR Rubber
Finishing	Skimming	---	Fabric
Colour	Green	Transparent	Green
Friction coefficient on iron	0,25	---	0,7

### TECHNICAL CHARACTERISTICS

Load for 1%[N/mm]	15,0	Breaking load [N/mm]	590	Working Temperature [°C]	-20 ÷ 100
Thickness [mm]	2,6	Production width [mm]	500	Diameter [mm]	135
Antistaticity	Yes	Mass [kg/m <sup>2</sup> ]	2,7	Splicing method	Skiving

### SPLICING PARAMETERS

Kind of skiving	A	Skiving length [mm]	40 ÷ 45	Press temperature [°C]	90	Pressing time [min]	40
-----------------	---	---------------------	---------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.