


BELTEX P20/14 TRANSMISSION BELT

Code 7104

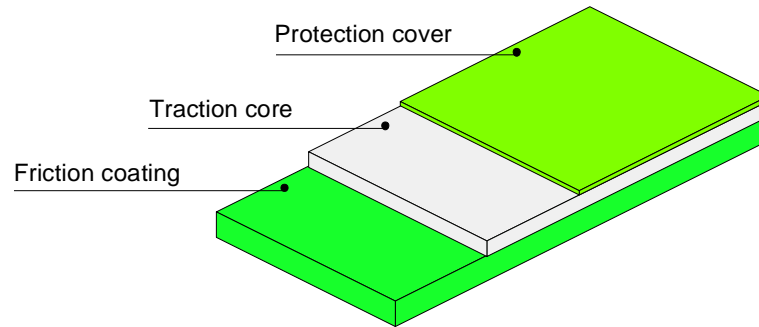

Most popular applications:

Transmission of small and mean horsepower. Paper industry, graphic arts, chemical, textile and mechanical industries, wood processing.

BELT STRUCTURE

Description	Protection cover	Traction core	Friction coating
Material	PA Fabric	PA sheet	XNBR Rubber
Finishing	---	---	Fine fabric
Colour	Green	Transparent	Green
Friction coefficient on iron	0,25	---	0,7

TECHNICAL CHARACTERISTICS

Load for 1% [N/mm]	1,5	Breaking load [N/mm]	70	Working Temperature [°C]	-20 ÷ 100
Thickness [mm]	1,3	Production width [mm]	500	Diameter [mm]	20
Antistaticity	Yes	Mass [kg/m ²]	1,5	Splicing method	Skiving

SPLICING PARAMETERS

Kind of skiving	A	Skiving length [mm]	25 ÷ 30	Press temperature [°C]	90	Pressing time [min]	15
-----------------	---	---------------------	---------	------------------------	----	---------------------	----

The data in this data sheet were measured at a temperature of +20° C and a relative humidity of 65 to 70%. Above data are subjected to change without prior notice by Sampla Belting Spa.