



SOLID WOVEN CONVEYOR BELTS

Solid Woven Belting for Biscuit, Cookie, Cracker Industry

TYPE	PLIES	DESCRIPTION	NOM. Thickness	WT.(lbs) in./ft.	TEMP. Range °F	MIN. PULLEY	AWT. lbs./in.	RECOMMENDED LACING	
								CLIPPER	ALLIGATOR


Bakery Duck	1	Natural Cotton, Square Weave	.064"	.016	0-225	Nose Bar	18	25LL	00
"A" Duck	1	Natural Cotton, Twill Weave	.081"	.030	0-225	Nose Bar	32	25	00
Fine Weave	2	Natural Cotton, Smooth Weave	.098"	.029	0-225	1"	55	1A	1
HS Poly	2	Polyester, Smooth Weave White, Head Set	.097"	.030	0-310	1"	100	1A	1

Air Permeable Fabric for Fluidized Bed Conveying

TYPE	PLIES	DESCRIPTION	NOM. Thickness	WT.(lbs) in./ft.	TEMP. Range °F
------	-------	-------------	----------------	------------------	----------------

Cotton / 3	3	Cotton Airslide Fabric	.167"	.047	0-225
Poly / 4	4	Polyester Airslide Fabric	.192"	.059	0-310
Type F	5	Heat Set Polyester Airslide Fabric	.220"	.075	0-310
FK Glass	3	Fiberglass Airslide Fabric	.300"	.165	30-800

Airslide Fabric Permeability

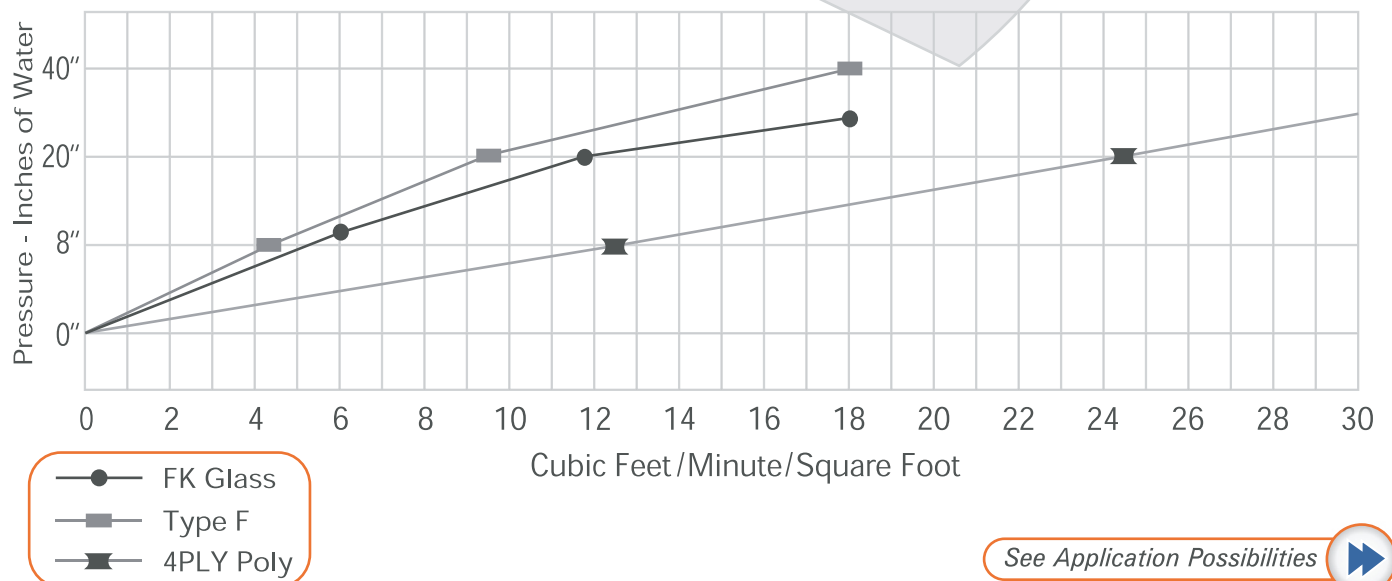

See Application Possibilities



General Application Information

BAKERY DUCK ▶

Woven single ply (square weave) construction. Recommended for oven infeed and oven discharge applications. Can be supplied sewn endless (diagonal splice) for rotary molders.

"A" DUCK ▶

Special single ply twill weave pattern for rotary molders.

FINE WEAVE ▶

Tightly woven, smooth 2 ply weave is suggested for many types of bakery applications such as: cooling conveyors, oven discharge and infeeds.

HS POLY ▶

2 ply, smooth weave. Heat set, specifically designed for Strayfield oven use.

AIRSLIDE FABRICS: ▶

COTTON,
POLYESTER & GLASS

Air gravity conveyors are used to move dry particle material in a variety of industries such as cement, detergent, transportation (bulk haulers, barges), flour and starch.

Sampla Belting - North America LLC:

40 Centre Drive, Orchard Park - NY 14127, USA ~ Phone: 1.716.667.7450 ~ Fax: 1.716.667.7428
Toll Free: 1.888.755.7450 ~ Fax: 1.888.324.7428 (Continental US Only) ~ E-mail: info@sampla.us ~ Website: www.sampla.us

HEAD OFFICE - FACTORY: Sampla Belting SRL Viale Delle Industrie 10-12 ~ Agrate Brianza (MI) 20041, Italy
Tel: +39.039.689.601 ~ Fax: +39.039.650.846/ 605.7428 ~ E-mail: info@samplabelting.it ~ Internet: www.sampla.it